

# ENM Cartridge Filters

## Nylon 6,6 Membrane



ENM Filter Cartridges are designed to meet the special needs of the electronics and high purity chemical industries. Able to remove particles below the rated pore size of the membrane, these cartridges are cost effective and exhibit superior retention. They are often used for DI water, photoresists, developers, and other compatible chemicals. Each cartridge module is pulse power flushed until the rinse effluent reaches 18+ megohm-cm, and less than 3 ppb TOC. Each cartridge module is also individually tested for integrity. Our design criteria and special procedures allow us to provide the highest quality electronics grade cartridges.

### Construction Materials

<b>Filtration Media</b>	Nylon 6,6 Membrane
<b>Media Support</b>	Polypropylene
<b>End Caps</b>	Polypropylene
<b>Center Core</b>	Polypropylene
<b>Outer Support Cage</b>	Polypropylene
<b>Sealing Method</b>	Thermal Bonding
<b>O-rings</b>	Buna, Viton® (or FKM), EP, Silicone, FEP Encapsulated Silicone, FEP Encapsulated Viton (or FKM)

### Dimensions

<b>Length</b>	5 to 40 in. (12.7 to 101.6 cm) nominal
<b>Outside Diameter</b>	2.75 in. (7.0 cm) nominal
<b>Filtration Area</b>	7.0 ft <sup>2</sup> (0.65 m <sup>2</sup> ) per 10 in. length

### Applications

- ◆ UP DI Water
- ◆ Solvents
- ◆ Photoresists
- ◆ Chemicals
- ◆ Process Water
- ◆ Developers

### Integrity Test Specifications

Per 10-in. length, water-wetted membrane

Pore Size	Air Diffusion Rate
0.10 µm	< 30 cc/min at 48 psig (3.3 barg)
0.22 µm	< 30 cc/min at 35 psig (2.4 barg)
0.45 µm	< 30 cc/min at 20 psig (1.4 barg)
0.65 µm	< 30 cc/min at 15 psig (1.0 barg)

### Maximum Operating Parameters

<b>Differential Pressure</b>	
• <b>Forward</b> (in water)	50 psid (3.4 barg) 20 °C (68 °F)
• <b>Reverse</b>	40 psid (2.7 barg) at 20 °C (68 °F)
<b>Operating Temperature</b>	82 °C (180 °F) at 10 psid (0.69 barg) in water
<b>Recommended Changeout Pressure</b>	35 psid (2.4 barg)

### Sanitization/Sterilization

<b>Filtered Hot Water</b>	90 °C (194 °F), 30 minutes, multiple cycles, max 3 psid forward flow
<b>Autoclave</b>	121 °C (250 °F), 30 min, multiple cycles
<b>In-line Steam</b>	135 °C (275 °F), 30 min, multiple cycles

For all elevated temperature procedures above, a stainless steel support ring is required.

#### Chemical Sanitization

Nylon does not tolerate aggressive chemical sanitization protocols. Nylon membrane cartridges are best sanitized with 1% hydrogen peroxide or 1% hydrogen peroxide and peracetic acid. Various manufacturers use different concentrations of active ingredients. Refer and adhere to the manufacturer's instructions for sanitizing nylon membrane..

### Total Performance

Critical Process Filtration, Inc. is a vertically integrated manufacturer of filtration products to industries in which filtration is considered a critical part of the manufacturing process. We supply a complete line of products and services to help you cost effectively satisfy all your filtration requirements from a single source.

## Quality Assurance and Standards


Our goal is to ensure our customers the greatest possible value for their filtration dollar. Our state of the art manufacturing facility and quality management system both meet ISO 9001:2008 standards. Each operation from assembly and test to cleaning, drying, and packaging is done in appropriately rated clean rooms. A sophisticated MRP system collects and processes real time data from manufacturing centers and inspection points. This allows variable and attribute data to be quickly and easily analyzed driving constant improvements in both quality and cost.

## Extractables

The levels of extractables in aqueous extracts from E-grade filters are below 3ppb of TOC after product rinse during manufacturing. E-grade filters typically exhibit very low levels of non-volatile residues during startup.

## Ordering Information

Cartridge order numbers have several variables from pore size to end cap type. For example, Electronics Grade Nylon 6,6 Membrane, 0.10 Micron Rating, No SS Support Ring, 20" Length, FEP Encapsulated Viton (or FKM) O-Rings, 2-222/Flat End Cap Configuration = ENM-10N00002T5.

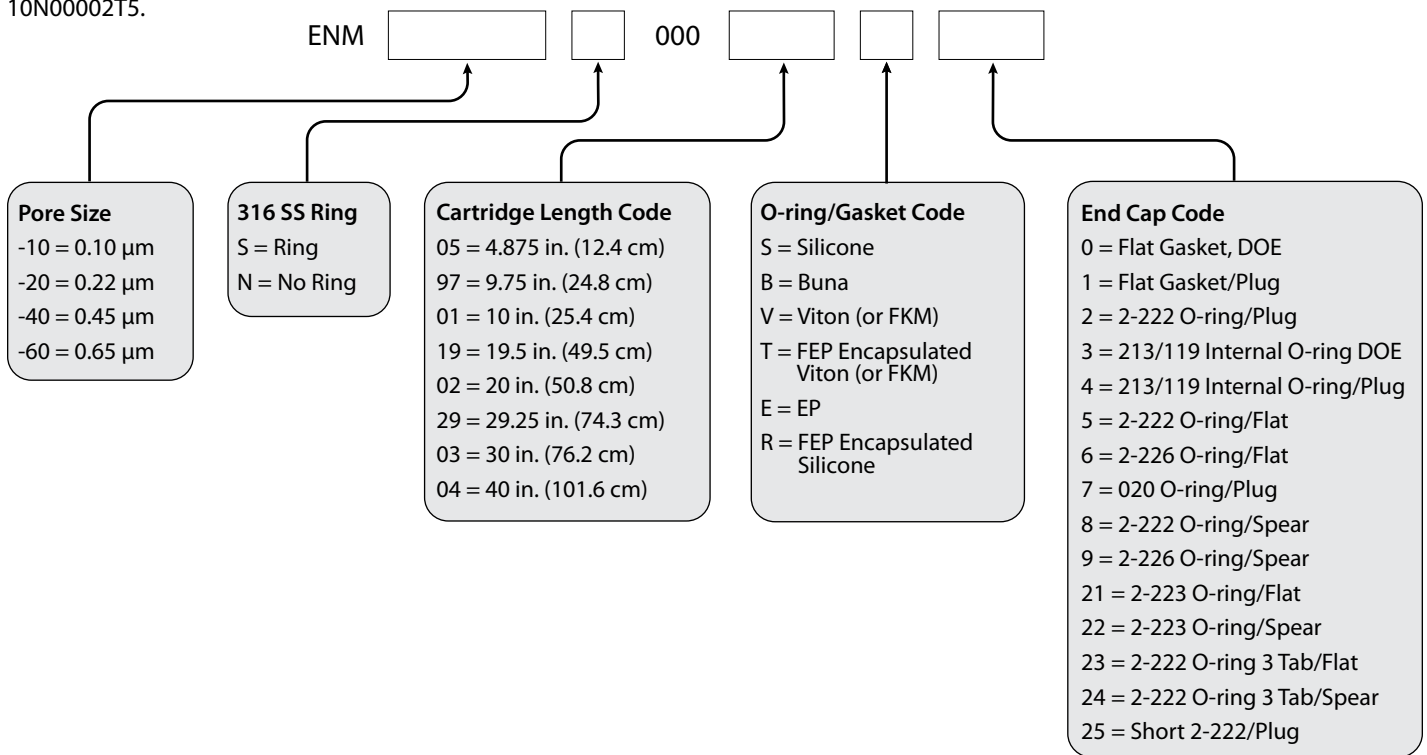

## Flow Rate

The Flow Rate table represents typical water flow at a 1 psid (69 mbard) pressure differential across a single 10 in. cartridge element. The test fluid is water at ambient temperature. Extrapolation for housings with multiple elements and higher pressure drops is acceptable, but as flows increase the pressure drop of the housing becomes more apparent.

Flow Rate Table

Pore Size	0.10 $\mu\text{m}$	0.22 $\mu\text{m}$	0.45 $\mu\text{m}$	0.65 $\mu\text{m}$
<b>GPM</b>	1.0	1.8	3.0	4.2
<b>LPM</b>	3.79	6.81	11.36	15.90

Request a **QUOTE** from your area representative



### Critical Process Filtration, Inc.

One Chestnut Street • Nashua, NH 03060  
Tel: 603.880.4420 • Fax: 603.880.4536

[criticalprocess.com](http://criticalprocess.com) • [sales@criticalprocess.com](mailto:sales@criticalprocess.com)

The information contained herein is subject to change without notice.

The Critical Process Filtration logo is a trademark of Critical Process Filtration, Inc.

Viton is a trademark of DuPont Performance Elastomers L.L.C.

© 2012-2014 Critical Process Filtration, Inc. • All Rights Reserved • Data Sheet ENMDS1011 Rev-