

CW Filters

High-Grade Yarn Wound Media



CW Yarn Wound Filter Cartridges are manufactured with high grade yarns that assure a consistent product. Designed for a wide spectrum of applications from process water to harsh chemicals to high temperature filtration, the CW cartridges are an economical solution for particulate removal in challenging environments. Pore sizes range from 0.5 micron to 300 microns.

CARTRIDGES – Nominal Dimensions

Length: 5 to 40 in. (12.7 to 101.6 cm)

Outside Diameter: 2.50 in. (6.35 cm) to 4.50 in. (11.43 cm)

CW yarn wound filters are recommended for filtration of:

- High Temperature Solutions
- Plating Solutions
- Waste Streams
- High Dirt Load Applications

Critical Process provides unrivaled delivery times, technical consulting before purchasing, and very competitively priced high-performance products. Our comprehensive testing/analysis and validation services support your team whenever they need it. Your process experts partnering with our filtration experts is how we deliver your company's solution right the first time.

Clarification & Prefiltration

Maximum Operating Parameters

MEDIA	POLY CORE	METAL CORE
Polypropylene	140 °F (60 °C)	180 °F (82 °C)
Cotton	140 °F (60 °C)	250 °F (121 °C)
Polyester	140 °F (60 °C)	275 °F (135 °C)
Nylon	140 °F (60 °C)	275 °F (135 °C)
Rayon	140 °F (60 °C)	275 °F (135 °C)


Construction Materials

Filtration Media	Polypropylene, Cotton, Polyester, Nylon, or Rayon Yarn
End Caps	Polypropylene
Center Core	Polypropylene, Glass Filled Polypropylene, Tin Plated Steel, 304 SS, or 316 SS
Core Extenders	Polypropylene, Tin Plated Steel, or 316 SS
O-Rings	Buna, Viton® (or FKM), EPDM, Silicone, FEP Encapsulated Silicone, FEP Encapsulated Viton (or FKM), Polyethylene Integra

CW Filters Ordering Information

All Critical Process filters are configurable to meet customer specifications.
Fill in the corresponding codes in the boxes below to build your Part Number.

To consult with one of our technical team members, request a quote or place an order:
call (603) 880-4420 Ext. 106, or send an email to sales@criticalprocess.com

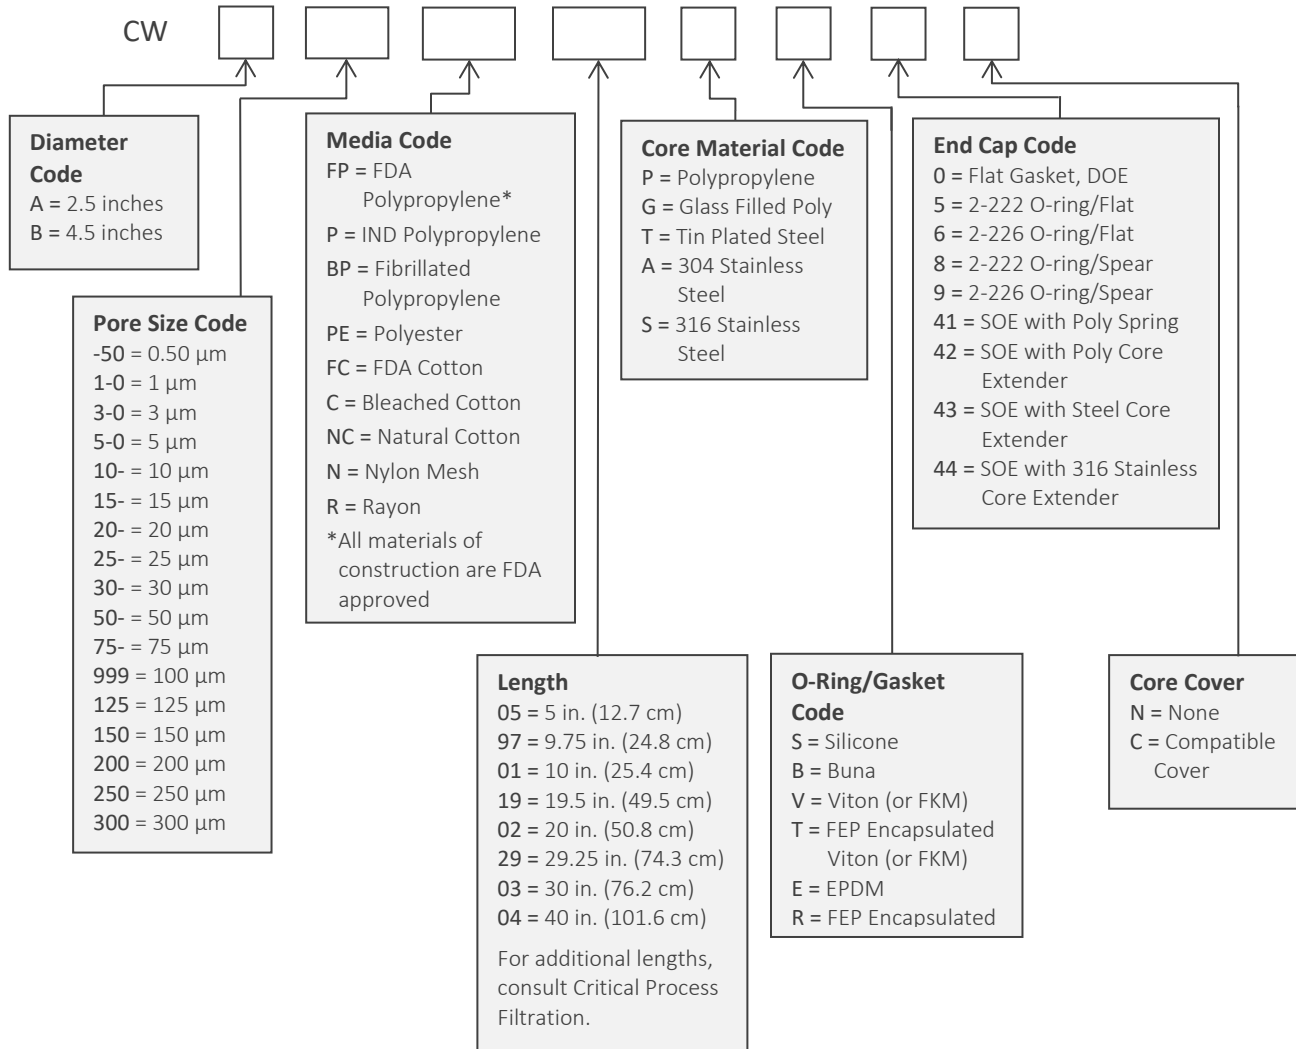

Housings

CPF offers Model CSH sanitary housings and Model CIH industrial housings in Single-Round (Inline and T-Style) and Multi-Round configurations. Contact us or visit our website for more information.



One Chestnut Street
Nashua, NH 03060
603.880.4420
FAX: 603.880.4536

CriticalProcess.com

The information contained herein is subject to change without notice. The Critical Process Filtration logo is a trademark of Critical Process Filtration, Inc. Viton is a trademark of DuPont Performance Elastomers L.L.C.
© 2021 Critical Process Filtration, Inc. • All Rights Reserved

Data Sheet CWDS Rev-