



# GDMB Filters


Melt-Blown Polypropylene Depth Media



GDMB filters are part of Critical Process Filtration's economical, general service product line that can be used to lower the total cost of filtration from simple to the most complex applications. Produced using the same quality materials and manufacturing excellence as our other product lines, you can be assured of their performance, dependability and scalability. While general service filters are not integrity tested or validated for retention, these highly efficient filters remove large amounts of contaminants early in the process to reduce the load on your expensive downstream filters. They are also useful as stand-alone clarifying or particle removal filters in less critical applications.

GDMB cartridge and capsule filters are made with a continuous spun bonding technology that assures a consistent media for prefiltering a wide range of liquids. It's 100% polypropylene construction provides wide chemical compatibility and low extractables. Pore sizes range from 1 to 100  $\mu\text{m}$ .

Critical Process provides unrivaled delivery times, technical consulting before purchasing, and very competitively priced high-performance products. Our comprehensive testing/analysis and validation services support your team whenever they need it. Your process experts partnering with our filtration experts is how we deliver your company's solution right the first time.



GDMB filters are recommended for the prefiltration of:

- Chemicals
- Plating Solutions
- Wash Solutions
- Potable Water
- Water Purification

## Clarification & Prefiltration



**CARTRIDGES – Nominal Dimensions**  
Length: 5 to 40 in. (12.7 to 101.6 cm)  
Outside Diameter: 2.50 in. (6.35 cm)



**CAPSULES – Nominal Dimensions**  
Length: 2 to 30 in. (5.1 to 76.2 cm)  
Outside Diameter: 3.50 in. (8.9 cm)

## Maximum Operating Parameters

	CARTRIDGES	CAPSULES
<b>Liquid Operational Pressure</b>	N/A	80 psi at 68 °F (5.51 bard at 20 °C)
<b>Gases Operational Pressure</b>	N/A	60 psi at 68 °F (4.13 bar at 20 °C)
<b>Operating Temperature (water)</b>	140 °F at 30 psid (60 °C at 2.1 bard)	140 °F at 30 psid (60 °C at 2.1 bard)
<b>Forward Differential Pressure</b>	50 psid at 68 °F (3.4 bard at 20 °C)	50 psid at 68 °F (3.4 bard at 20 °C)
<b>Reverse Differential Pressure</b>	20 psid at 68 °F (1.4 bard at 20 °C)	20 psid at 68 °F (1.4 bard at 20 °C)
<b>Recommended Changeout Pressure</b>	35 psid (2.41 bard)	35 psid (2.41 bard)

## Sanitization & Sterilization

<b>Chemical Sanitization</b>	Performed using industry standard concentrations of hydrogen peroxide, peracetic acid, sodium hypochlorite and other selected chemicals.
------------------------------	--

### Endotoxins

The levels of bacterial endotoxins in aqueous extracts from GDMB filters are below current USP limits as specified for water for injection.

### Extractables

GDMB filters typically exhibit low levels of non-volatile residues.

### Non-Fiber Releasing

GDMB filters comply with Title 21 CFR sections 210.3 (b)(6) and 211.72, for non-fiber releasing filters.





### FDA Compliance

Materials meet the requirements listed by the FDA as appropriate for use in articles intended for repeated food contact as specified in Title 21 CFR sections 174.5, 177.1500, 177.1520, 177.1630, 177.2440, and 177.2600 as applicable.

## Construction Materials





<b>Filtration Media</b>	Melt-Blown Polypropylene Depth Media
<b>End Caps, Capsule Housing</b>	Polypropylene
<b>Sealing Method</b>	Thermal Bonding
<b>O-Rings/Gaskets Cartridges only</b>	Buna, Viton® (or FKM), EPDM, Silicone, FEP Encapsulated Silicone, FEP Encapsulated Viton (or FKM)

## Flow Rates for GDMB Cartridges

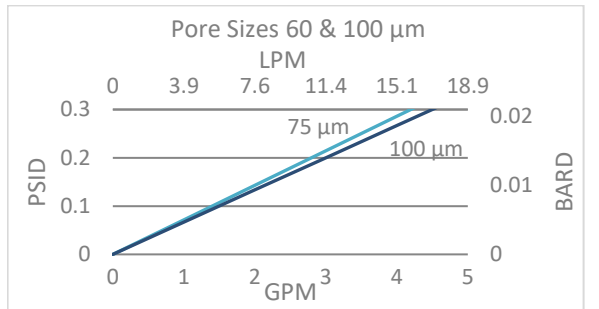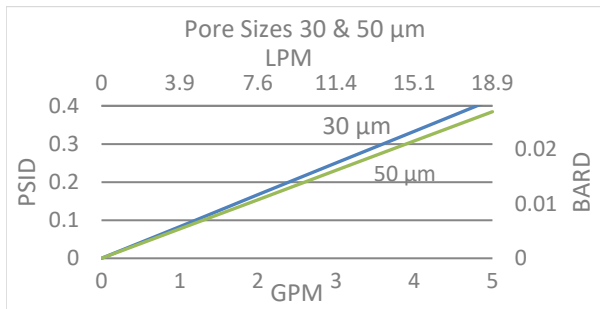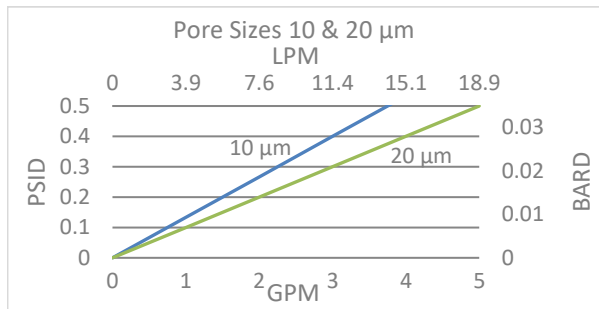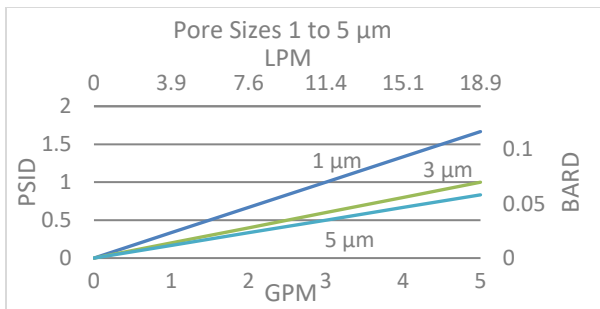

Flow rates for Cartridge filters are per 10-inch length. The test fluid is water at ambient temperature.

## Flow Rates for GDMB Capsules

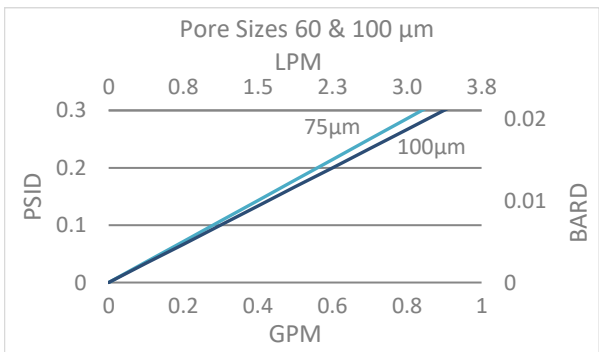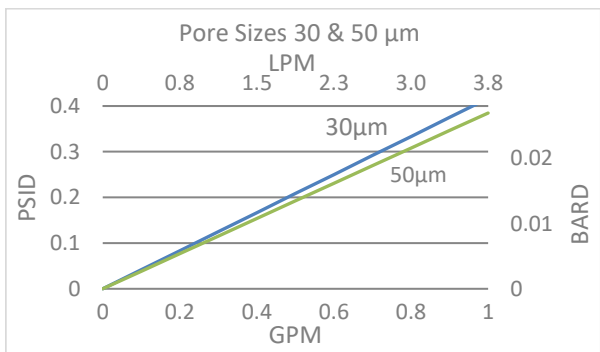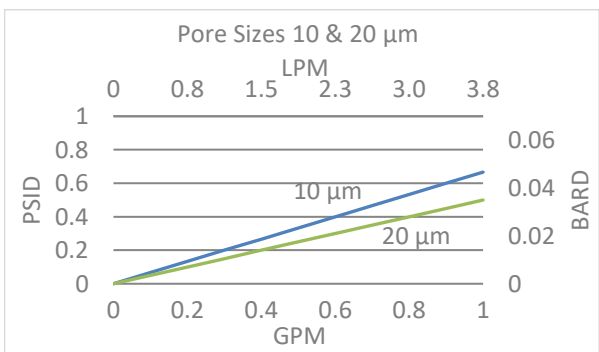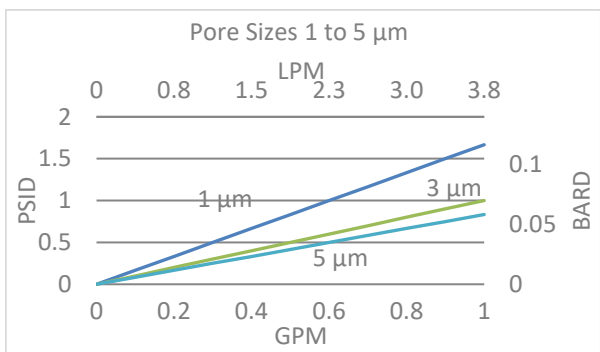


Flow rates for Capsule filters are per 2" of module length. The test fluid is water at ambient temperature. Flows are tested using a 2" capsule filter with 1/2" FNPT inlet and outlet ports. Rates will vary based on end configuration of the capsule.

## GDMB Filters Ordering Information


All Critical Process filters are configurable to meet customer specifications.  
Fill in the corresponding codes in the boxes below to build your Part Number.

To consult with one of our technical team members, request a quote or place an order:  
call (603) 880-4220 Ext. 106, or send an email to [sales@criticalprocess.com](mailto:sales@criticalprocess.com)

### Cartridge Filters

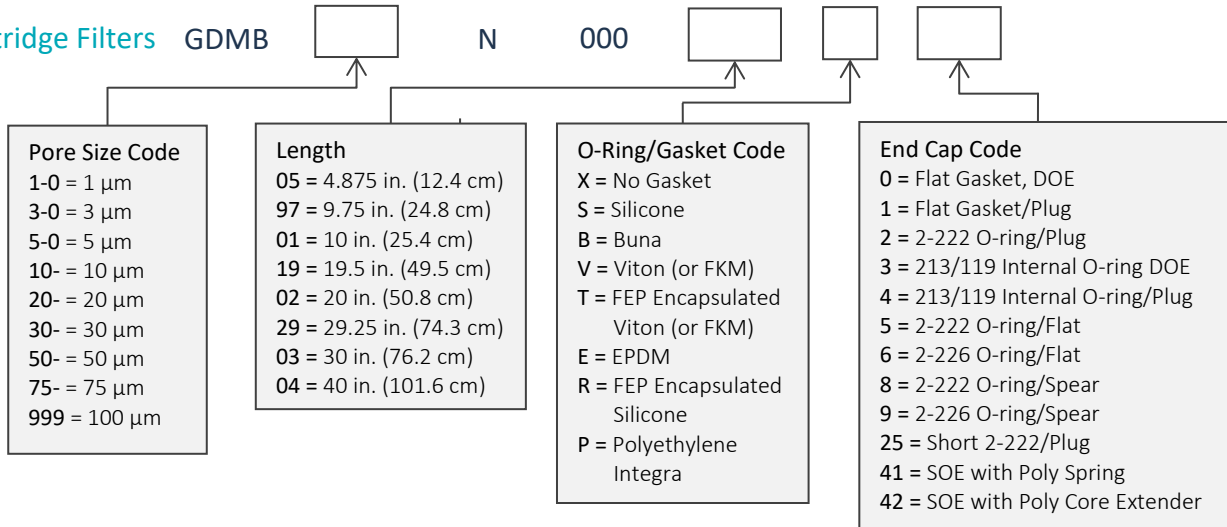

### Capsule Filters

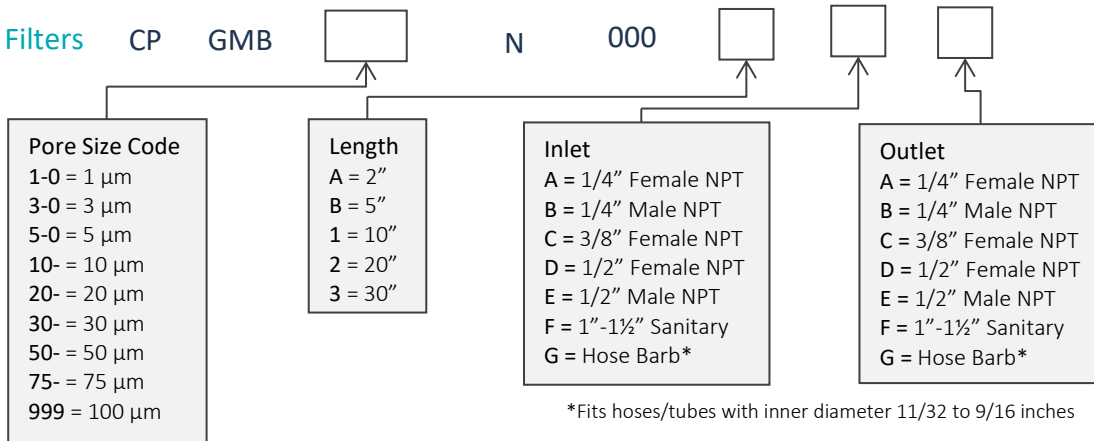

### Housings

CPF offers Model CSH sanitary housings and Model CIH industrial housings in Single-Round (Inline and T-Style) and Multi-Round configurations. Contact us or visit our website for more information.



One Chestnut Street  
Nashua, NH 03060  
603.880.4420  
FAX: 603.880.4536  
CriticalProcess.com

The information contained herein is subject to change without notice. The Critical Process Filtration logo is a trademark of Critical Process Filtration, Inc. Viton is a trademark of DuPont Performance Elastomers L.L.C.  
© 1998-2019 Critical Process Filtration, Inc. • All Rights Reserved

Data Sheet GDMBDS0919 Rev-