



CUR Filter Housings

Single Cartridge Industrial Housings


CUR housings, made with 316L stainless steel, are designed for commercial and industrial applications. These single cartridge housings include universal cups to fit multiple cartridge end caps: Double Open End (DOE), 2-222 O-ring/plug and 213 internal O-ring/plug. Every housing is supplied with a mounting kit and sump rod.

Maximum Operating Parameters

Operating Pressure	300 psi (20 bar)
Operating Temperature	200 °F (93 °C)

Specifications


Housing Head & Sump	316 Stainless Steel
O-Rings Options	EPDM (std), Buna, Viton (or FKM), FEP Encapsulated Viton (or FKM)
Cartridge Seal	DOE (End Cap code "0") 2-222/plug (End Cap code "2") 213/plug (End Cap code "4")
Drain with Plug	¼"
Spring Loaded Seal	Yes
Gauge Ports (2)	¼" FNPT
Inlet/Outlet	1" FNPT
Mounting Kit and Sump Rod Included	Yes
Maximum Cartridge Diameter	2 ¾"

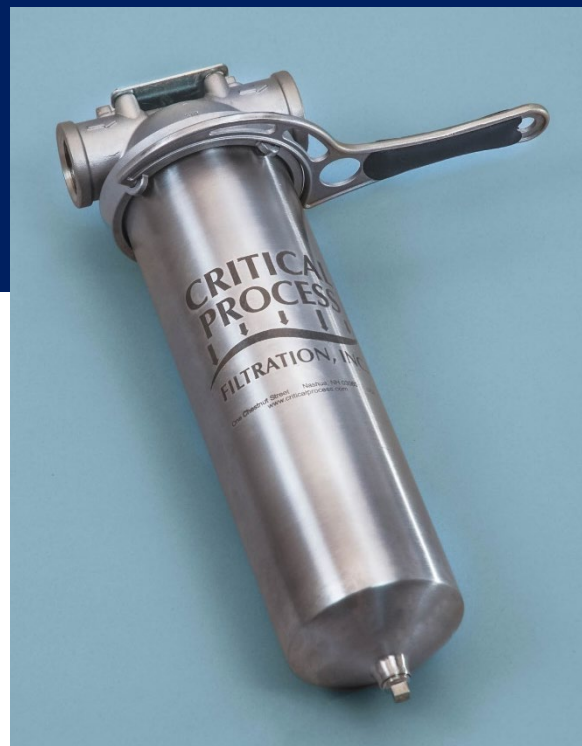

CUR Single Cartridge Industrial Housing
Nominal Lengths – 5 in. to 30 in.

Dimensions

Model	Nominal Cartridge Length	Overall Height (A)
CUR5	5"	10.6"
CUR1	10"	15.0"
CUR2	20"	25.0"
CUR3	30"	35.0"

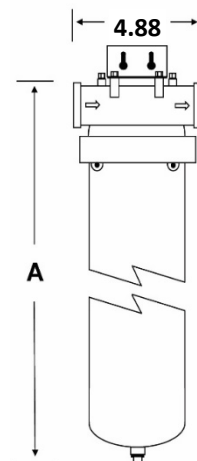

CUR Single Cartridge Housing Ordering Information


All Critical Process filter housings are configurable to meet customer specifications.

Fill in the corresponding code in the box below to build your Part Number.

To consult with one of our technical team members, request a quote or place an order:

call (603) 880-4420 or [contact us here](#).

CUR Single Cartridge Filter Housing

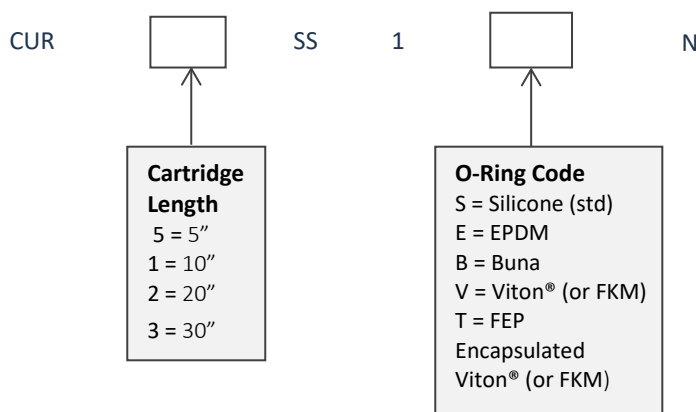

CUR Wrench is available and ordered separately.

Critical Process provides unrivaled delivery times, technical consulting before purchasing, and very competitively priced high-performance products. Our comprehensive testing/analysis and validation services support your team whenever they need it. Your process experts partnering with our filtration experts is how we deliver your company's solution right the first time.



One Chestnut Street
Nashua, NH 03060
603.880.4420
FAX: 603.880.4536

CriticalProcess.com

The information contained herein is subject to change without notice. The Critical Process Filtration logo is a trademark of Critical Process Filtration, Inc. Viton is a trademark of DuPont Performance Elastomers L.L.C.
© 2021 Critical Process Filtration, Inc. • All Rights Reserved

Data Sheet CURDS Rev A